

Gunn Surface Mount

Product Description


Professional 10 Watt LED surface mounted downlight with dual reflector system to provide smooth glare-free output. Multi-chip technology means constant colour temperature. Assembled in Australia from corrosion resistant componentry. Easily customised. Also available as a pendant (A8 or A88) or as a track mounted fitting (Gunn Track).

Product Details

Application	General Illumination
Trim Colours	White, Black, Custom
Reflector Finishes	White, Black, Dark Satin, Rose Champagne, Gold, Ice Blue
Materials	Anodised aluminium reflector and heatsink. 304 stainless steel fascia

Technical Data

Input Power	240V 350mA (10W)
	driver c/w flex and plug plug
Power Consumption	10W
Colour Temperature	2700K
	3000K
	4000K
Lumen Output	
(10W) 3000K	700 lm (approx)
(10W) 4000K	780 lm (approx)
CRI	92
Lumen Maintenance	70% at 50 000 hrs
Dimming	TR Leading/Trailing Edge (Standard)
	DaliDD Dim
	DC 1-10V DC Control

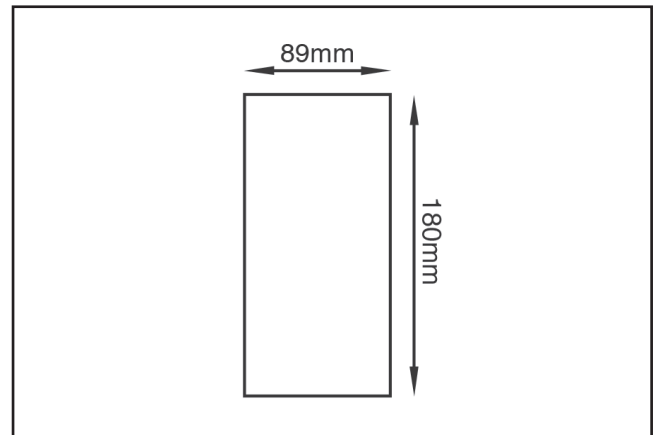

Order Information

Specify fitting options as per example below to order.

Example: **GSM - 10W - 2 - 15R - 27K - NB - TR**

Fitting	Watts	Colour	Reflector	CCT	Beam	Dimming
GSM	-		-		-	

GSM	10W	2	Standard	Special	27K	NB	TR
Gunn Surface Mount	10 Watts	Black			2700K	Narrow Beam (14°)	Leading/Trailing
		3 White	3R White	16R Rose	3K 3000K	MB Medium Beam (29°)	DD Dali Dim
		6 Silver	2R Black	15R Gold	4K 4000K	WB Wide Beam (44°)	DC 1-10V DC Control
		5 Custom	10R Dark Satin	11R Ice Blue			
			18R Champagne				


Standard Reflector Colours

White

Black

Dark Satin

Champagne

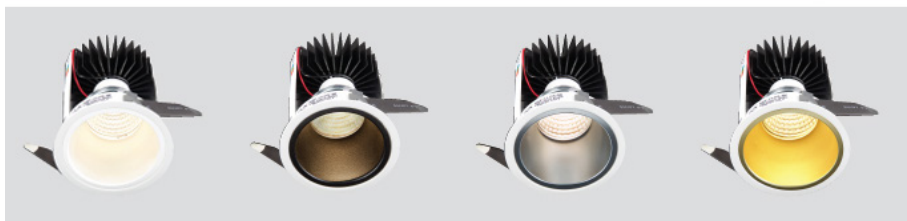

Special Reflector Colours

Rose

Gold

Ice Blue



Reflectors are shown illuminated.