

# Gunn Pendant

## Product Description


Simple cylindrical suspended pendant utilising high output COB LED Technology. Available in 15W and 21W versions. Multiple mounting, suspension and lumen output options. Designed and manufactured in Australia

## Product Details

Application	Commercial Interiors
Trim Colours	White, Black, Silver, Custom
Reflector Finishes	White, Black, Dark Satin, Rose Champagne, Gold, Ice Blue
Materials	6061 machined aluminium - chromate dipped and polyester powder coated.

## Technical Data

Input Power	240V 350mA (15W) or 500mA (21W) driver c/w flex and plug	
Lumen Output		
(15W) 2700K		900 lm
(15W) 3000K		1000 lm
(15W) 4000K		1100 lm
(21W) 2700K		1200 lm
(21W) 3000K		1363 lm
(21W) 4000K		1500 lm
CRI		92
Lumen Maintenance		70% at 50 000 hrs
Dimming	TR Leading/Trailing Edge (Standard)	
	DaliDD Dim	
	DC 1-10V DC Control	
Mounting options	Cable Suspension Rod Suspension 3 Circuit Track Suspension	

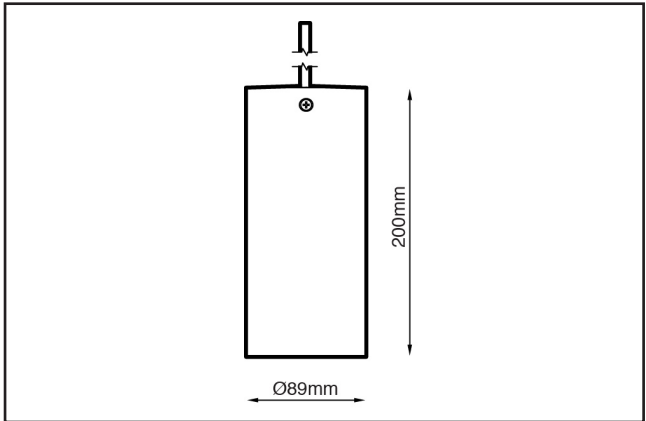

## Order Information

Specify fitting options as per example below to order.

Example: **GP - 15W - 2 - 15R - 27K - NB - TR**

Fitting	Watts	Colour	Reflector	CCT	Beam	Dimming
GP						

GP	15W	2	Standard	Special	27K	NB	TR
Gunn Pendant	15 Watts	Black			2700K	Narrow Beam (24°)	Leading/Trailing
	21W	3	3R	16R	3K	MB	DD
	21 Watts	White	White	Rose	3000K	Medium Beam (38°)	Dali Dim
		6	2R	15R	4K	WB	DC
		Silver	Black	Gold	4000K	Wide Beam (60°)	1-10V DC Control
		5	10R	11R			
		Custom	Dark Satin	Ice Blue			
			18R				
			Champagne				


Standard Reflector Colours

White

Black

Dark Satin

Champagne

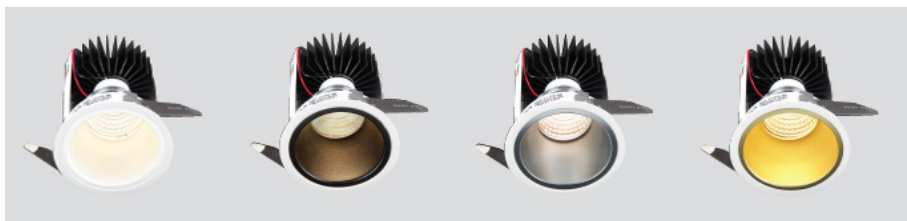

Special Reflector Colours

Rose

Gold

Ice Blue



Reflectors are shown illuminated.